


STICKY MAT

1. Product Name and Company Information

Product name: STICKY MAT
 Company name: TLY Technology Co.,Ltd
 Address: Room 605,Huaide Yinshan Building, Fuwei
 Community, Fuyong Street, Baoan District,
 Telephone number: (86) 0755-27580932

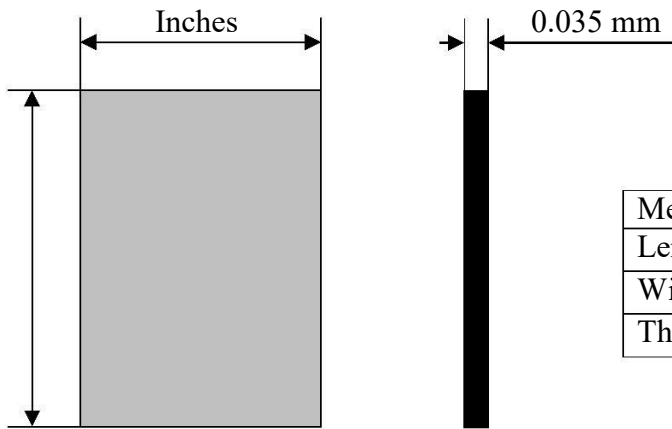

Measurement	
Length (in)	45±0.3
Width (in)	26±0.3
Thickness(mm)	0.035±0.005

2.Material identification

Material:Contamination control mats
 Composed of polyethylene films
 Coated with acrylic-based adhesive.

Color: blue ,customized

Size:26" ×45"

Layers: 60 sheets,customized

Package: 5 mats/ctn,customize

Parts should meet seagate specification 35391-001.

3. Specifications

MAT THICKNESS:1.2mm

- A) First cover sheet—0.04±0.004mm
- B) 29 Single film fayer—0.035±0.003mm
- C) 1 Double layer film—0.04±0.004mm
- D) Last cover sheet—0.04±0.003mm

Sticky Mat

4. PHYSICAL&CHYMIC DATA

Property

S/N	Test Item	Standard	
1	Longitudinal pull intensity(Mpa)	≥10	
2	Transverse pull intensity(Mpa)	≥8	
3	Longitudinal split elongation rate (%)	≥250	
4	Transverse split elongation rate(%)	≥750	
5	180°Peeling strength(g/25mm)	350g±30g/25mm	
6	Dimension	Length	914.4±8mm
		Width	609.6±8mm
		Thickness	0.035±0.005mm
Judgement		Accord with Standard	

Test procedures available upon request

5. Special hazards: none

6. Health hazards data:

Skin/Ingestion: Non-Toxic

Carcinogen city: None

7. FIRE FIGHTING PROCEDURE

General extinction method can be used. water spray, carbon dioxide, extinguishing powder or foam can be used as an extinguishing media. While fire fighting, wear protective equipment such as self-contained breathing apparatus, depending upon the fire situation.